

ThermaCAM™ E65


Everything you expect from an infrared camera ...



- EXTREMELY HIGH THERMAL SENSITIVITY
- UNPARALLELED IMAGE QUALITY
- USEABLE IN ALL WEATHER CONDITIONS (IP54)
- RECORDS IMAGES AT A FRAME RATE OF 50 HZ
- RADIOMETRIC JPEG IMAGE STORAGE (UP TO 200 IMAGES)
- IN-FIELD TEXT ANNOTATION
- A WIDE RANGE OF ACCESSORIES AND LENSES
- SHORT FOCUS DISTANCE
- COMPATIBLE WITH THERMACAM™ REPORTER™ SOFTWARE
- THERMACAM QUICKVIEW™ INCLUDED



**Affordable full-featured
infrared camera**

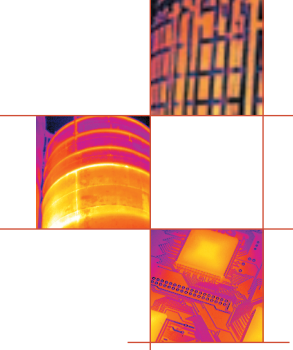

ThermaCAM™ E65 A unique infrared tool

- Highly affordable
- Ultra compact
- Extremely light: 700 grams battery included
- Maintenance free uncooled microbolometer detector
- Non-contact precision temperature measurement
- High thermal sensitivity: 0.10°C
- Temperature range:
-20°C up to +250°C (+900°C optional)
- Audible alarm
- Auto hot-spot
- In-field text annotation
- Stores up to 200 images in radiometric JPEG format
- Useable indoor and outdoor
in all weather conditions (IP54)
- Built-in laserpointer
- Software for detailed post-analysis and reporting available




AFFORDABLE IMAGING, MEASUREMENT, STORAGE AND ANALYSIS IN THE PALM OF YOUR HAND

In cooperation with its customers, FLIR Systems, the world leader for infrared thermography, has further developed its successful ThermaCAM™ E-series range.

The result is the ThermaCAM E65. A small and smart infrared camera. Fitting in the palm of your hand, the ThermaCAM E65 offers non-contact temperature measurement, crisp thermal imaging, in-field image analysis and storage and both qualitative and quantitative post-analysis and reporting.

The ThermaCAM E65 is the only camera that offers you practically all the possibilities of a high range infrared camera at an affordable price.






PRECISION TEMPERATURE MEASUREMENT - EXTRAORDINARY IMAGE QUALITY

The E65 delivers unmatched temperature measurement accuracy. The result is a thermal sensitivity of 0.10°C and clear noise-free images.


A low thermal sensitivity not only offers you the possibility to see the smallest of temperature changes, it also means that you get a clear, noise-free, excellent quality image which cannot be obtained by less sensitive cameras. Thanks to these very detailed images, which are displayed on the camera's 2.5" color LCD, you will clearly see the smallest temperature changes.



**THERMACAM QuickVIEW:
BASIC REPORTING SOFTWARE INCLUDED:**



20 Hz



50 Hz

THERMACAM™ QuickVIEW™:

BASIC REPORTING SOFTWARE INCLUDED:

The ThermoCAM E65 comes with the ThermoCAM QuickView software included. This allows you to do basic post-analysis of your captured IR images and to make simple reports in a PDF-format. Microsoft Word® based ThermoCAM Reporter™ software is optionally available.

VIEW SENSITIVE THERMAL IMAGES AT REAL-TIME FRAME RATES (50 Hz)

If you really want to detect subtle temperature variations that can signal significant problems on moving targets, you need to capture images at a speed of 50 Hz. Capturing images at a lower frame rate results in a disturbed image so that potential problems can be overlooked.

FLEXIBLE STANDARD JPEG IMAGE STORAGE

The camera stores up to 200 infrared pictures in standard, low density JPEG format, giving you instant visibility of the images stored in the field.

Since all images are in JPEG format you can easily share them with your colleagues. There is no need to use special viewing software. All images can easily be imported in the optional available ThermoCAM Reporter software for further detailed analysis.






EASY OPERATION

At the touch of a button you can easily change color palettes, emissivity settings, temperature ranges and other analysis tools. Built-in menu systems provide easy access to advanced, yet simple to use software.

SMART POWER MANAGEMENT

No need to worry about batteries dying and losing valuable inspection time. The lightweight, long-life Li-Ion battery ensures uninterrupted inspections. It runs up to 2 hours and the ThermoCAM™ E65 features an internal battery charger. A 2-battery charging system is also included. It features a car/truck charger adapter so that you can charge to camera on the way to your next job.

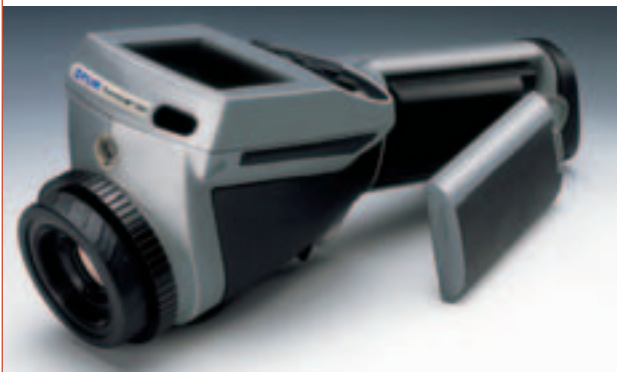

LOCATE AND ANALYZE PROBLEMS FAST

Analyze problems and share results with your colleagues in the field. Movable crosshairs allow you to measure and analyze the temperature at a single point. Find the hottest spot in a defined area, highlight areas of concern with color or sound alarms. The ThermoCAM E65 has all the analysis tools you need to make instant decisions in the field.

EASIER AND QUICKER INSPECTIONS THANKS TO POWERFUL AND USEFUL FEATURES

- Sound and color alarms: the operator can set a maximum temperature in the camera. If the E65 is pointed to an object and this temperature is exceeded, the camera will produce an audible and/or a visible alarm.
- Movable crosshair: a joystick allows moving the crosshairs for temperature measurement on any pixel in the IR image. A considerable advantage over having just one fixed spot in the middle.
- Automatic cold or hot spot: the ThermoCAM E65 automatically detects the coldest or the hottest spot in the infrared image.
- Full temperature measurement and analysis capabilities: on both live and saved images.
- Temperature differential measurement: calculates temperature differences between 2 measurement spots, directly in the field.
- In-field text annotations: stores basic text comments together with the infrared image.
- Incorporated emissivity tables: pre-defined values for often inspected materials can be stored in the camera.
- Laser LocatIR™: helps to associate the hot spot on the IR image with the real physical target and enhances user safety.




))) beep
beep

RUGGED, ERGONOMIC AND LIGHTWEIGHT:

USEABLE IN ALL WEATHER CONDITIONS

Dust- and splashproof, the E65 meets IP54 standards and withstands harsh industrial environments. It can be used both indoors and outdoors in the most diverse weather conditions. Hold the ThermoCAM E65 in your hand. Clip it to your belt or put it in your toolbox. With a weight of less than 700 grams, the E65 is the lightest infrared camera in the world.

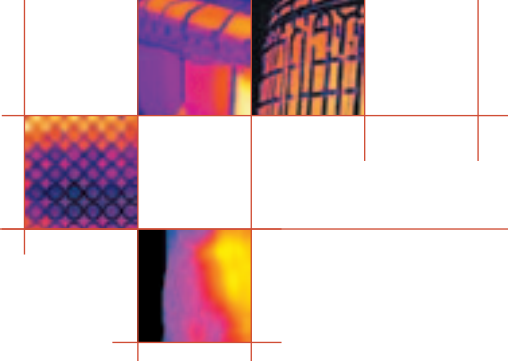

**ADAPTABLE TO EVERY SITUATION -
A WIDE RANGE OF ACCESSORIES**

When doing predictive maintenance inspections, you might end up in situations where you do not have the room to step back. A wide angle lens is then the perfect solution. When you are looking at objects which are a distance away you can use a telephoto lens. Interchangeable optics offer the thermographer the flexibility needed to adapt his camera to the most demanding applications.

To ensure perfect images on the LCD display in direct sunlight a sunshield is available.



**POST ANALYSIS AND AUTOMATED REPORT GENERATION
IN A FAMILIAR ENVIRONMENT**

Full radiometric images captured by the ThermoCAM E65, can easily be downloaded and integrated in the optional ThermoCAM Reporter™ software.

ThermoCAM Reporter allows you to create all your reports in a familiar software environment. From now on, you can not only make your own templates for infrared inspection reports in Microsoft Word, but you can also analyse your infrared images within the same program. An extra toolbar appearing on your screen gives you instant access to specific functions for detailed analysis. Setting temperature spots, creating histograms and line profiles, changing emissivity settings,... are just a few of the tools that can be accessed by a simple mouse-click.

Since all your images are in JPEG format and all your reports in Word format, you can easily share them with your colleagues. Anyone can open and read your files. No need for special viewing software.



INFRARED CAMERAS:

- Perform inspections when systems are under load
- See the heat produced
- Are contactless
- Identify and locate the problem
- Measure the temperature
- Store the information
- Give you the answers you need to understand what needs to be fixed
- Find the problems before they actually occur
- Save you valuable time and money



WHY USE INFRARED ?

Nearly everything that uses or transmits power gets hot before it fails. Cost effective power management is critical to maintaining the reliability of your electrical and mechanical systems. Infrared thermography is an effective predictive maintenance (PM) technology to quickly, accurately and safely locate problems prior to failure. Whether viewing electrical components indoors or outdoors, doing mechanical inspections, inspecting process installations, ThermoCAM™ E65 can instantly locate hot spots prior to failure. Inspections can be safely performed while electrical systems are under load. Common electrical targets are: switchgear, breakers, fuses, electrical panels, and bolted connections.

RETURN ON INVESTMENT

Infrared cameras have proven to be an invaluable resource for predictive maintenance. They can locate problems well in advance of failure resulting in rapid pay-back on investment and avoiding costly plant shutdowns. The ThermoCAM E65 not only locates problems quickly, its non-contact precision temperature measurement capabilities deliver the answers you need to decide what repair action to take, and when.


Regular surveys of a steel mill's substations potentially save tens of thousands of euros per year. A major steel company discovered a significant temperature rise in one of their 69 kV breakers. If this problem had gone undetected it could have cost the company 50,000 euros per hour in lost time due to shutdown of the casters. Total loss of power to a mill is estimated to be over 250,000 euros an hour.

At a public electric utility company, a routine thermographic survey indicated one of the output filter capacitors of a station battery charger was considerably cooler than the others. As a result, the capacitor in question was tested and found to have failed. Replacement of the failing capacitor avoided an outage, saving an estimated 500,000 euros.


See what
infrared
can do
for you
today




See loose connections

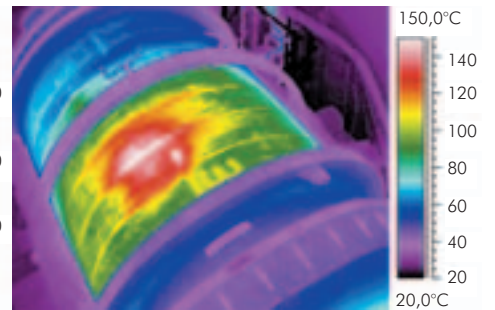


Hot spot in oven

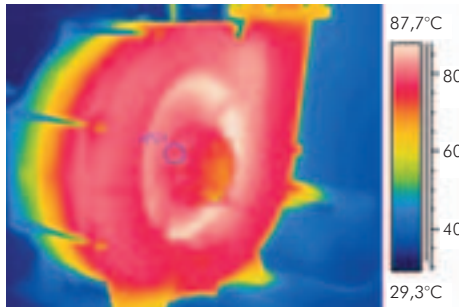


Overloaded pump

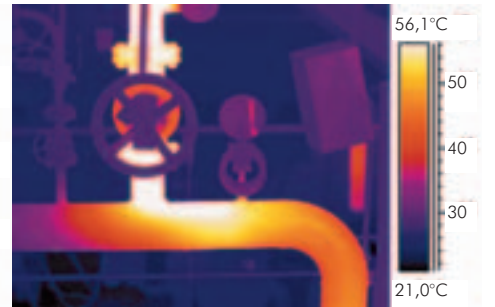


Steam trap

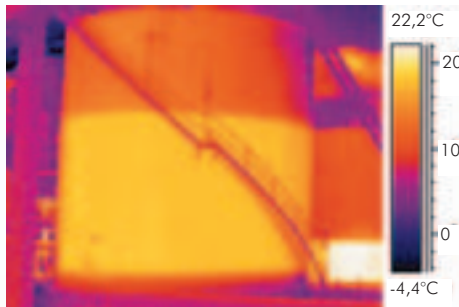


Level detection in tanks

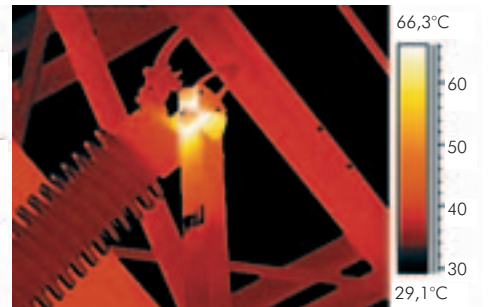


Find incorrectly secured connections

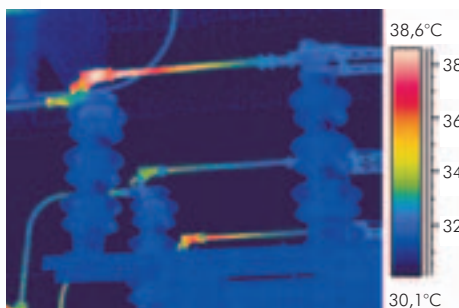


See oxidation of HV switches

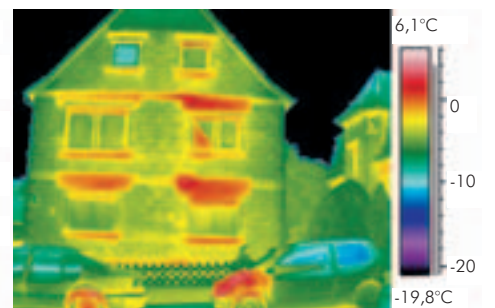

Hot spots due to bad insulation

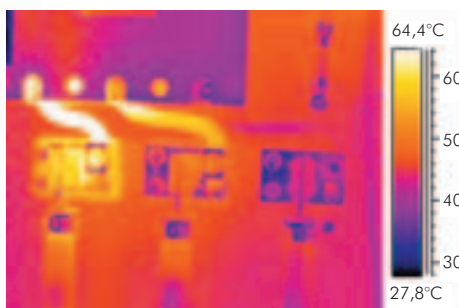

Measure fuses

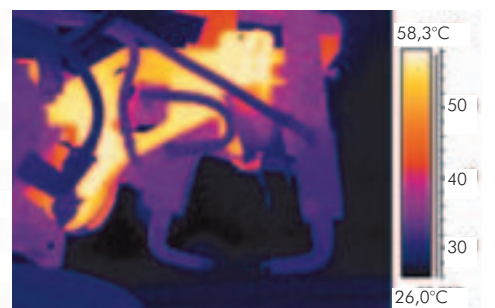

Hot spot in welding robot

TECHNICAL SPECIFICATIONS

IMAGING PERFORMANCE

| | |
|--------------------------------------|--------------------------------------------------|
| Field of view/min focus distance | Typical 19° x 14°/0.3 m (with 17 mm lens) |
| Thermal sensitivity | 0,10°C at 30°C |
| Image frequency | 50/60 Hz non-interlaced |
| Focus | Manual |
| Detector type | Focal Plane Array (FPA), uncooled microbolometer |
| | 160 x 120 pixels |
| Spectral range | 7.5 to 13 μm |
| Optical resolution (with 36 mm lens) | 300:1 |

IMAGE PRESENTATION

| | |
|------------------|-------------------------------------------|
| Video output | PAL or NTSC, standard RCA composite video |
| External display | 2.5" color LCD, 16K colors |

MEASUREMENT

| | |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature range | -20°C to +250°C (-4°F to +482°F) up to +900°C optional |
| Accuracy | ±2°C, ±2% |
| Repeatability | ±1°C, ±1% |
| Measurement mode | 3 movable spots, area max, area min, area average, temp. difference color and/or sound alarm above or below, auto hot-spot Palettes (iron, rainbow, rainbow HC, B&W, B&W inverse), auto-adjust (continuous/manual) |
| Menu controls | Date/time, temperature units °C/°F, language, scale, info field, LCD intensity (high/normal/low) |
| Set-up controls | Date/time, temperature units °C/°F, language, scale, info field, LCD intensity (high/normal/low) |
| Measurement corrections | Emissivity variable from 0.1 to 1.0, reflected ambient |

IMAGE STORAGE

| | |
|---------------------------|-------------------------------------------------------------|
| Type | Built-in FLASH memory (up to 200 images) |
| File formats | Standard JPEG |
| Text annotation of images | Predefined text selected and stored together with the image |

LENSES (OPTIONAL)

| | |
|-----------------|-------------------------------------------|
| 2 x Telescope | Typical 9° x 7°/1.2 m (with 36 mm lens) |
| 0.5 Wide angle | Typical 34° x 25°/0.1 m (with 9 mm lens) |
| 0.25 Wide angle | Typical 60 x 45°/0.1 m (with 4.5 mm lens) |



adapt your camera to EVERY situation

LASER LOCATOR™

| | |
|----------------|------------------------------------------------------|
| Classification | Class 2 |
| Type | Semiconductor AlGaInP Diode Laser: 1mW/635 nm red |

BATTERY SYSTEM

| | |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type | Li-Ion, rechargeable, field replaceable |
| Operating time | 2 hours continuous operation. Display shows battery status |
| Charging system | In camera, AC adapter or 12 V from car (with optional Std. cable) 2 bay intelligent charger, 12 V AC adapter 90-260 V AC, 50/60 Hz, 12 V DC out 11-16 V DC |
| AC operation | Automatic shutdown and sleep mode (user selectable) |
| Voltage | |
| Power saving | |

ENVIRONMENTAL SPECIFICATION

| | |
|-----------------------------|-------------------------------------------------------------------|
| Operating temperature range | -15°C to +45°C (+5°F to +113°F) |
| Storage temperature range | -40°C to +70°C (-40°F to +158°F) |
| Humidity | Operating and storage 20% to 80%, non-condensing IP54, IEC 359 |
| Encapsulation | |
| Shock | Operational: 25G, IEC 68-2-29 |
| Vibration | Operational: 2G, IEC 68-2-6 |

PHYSICAL CHARACTERISTICS

| | |
|-----------------|-----------------------------------------------|
| Weight | 700 g (1.5 lbs.), incl. battery with 25° lens |
| Size | 265 mm x 80 mm x 105 mm (10.4" x 3.1" x 4.1") |
| Tripod Mounting | 1/4" - 20 |
| Cover case | Plastic and rubber |

INTERFACES

| | |
|-------------------------|-------------------------------|
| USB | Image and text transfer to PC |
| RS-232 cable (optional) | Image and text transfer to PC |
| Video Output | Standard RCA composite video |

THERMACAM E65 INCLUDES:

IR camera, Carrying case, Power supply, Handstrap, Lens cap, ThermoCAM QuickView™ Software, USB cable, User manual, Power cord, Battery (2), Battery charger

FLIR SYSTEMS AB

World Wide Thermography Center
Rinkebysvägen 19 - PO Box 3
SE-182 11 Danderyd
Sweden
Tel.: +46 (0)8 753 25 00
Fax: +46 (0)8 753 23 64
e-mail: sales@flir.se
www.flir.com

FLIR SYSTEMS LTD.

United Kingdom
Tel.: +44 (0)1732 220 011
e-mail: sales@flir.uk.com

FLIR SYSTEMS CO. LTD.

Hong Kong
Tel.: +852 27 92 89 55
e-mail: flir@flir.com.hk

FLIR SYSTEMS GMBH

Germany
Tel.: +49 (0)69 95 00 900
e-mail: info@flir.de

FLIR SYSTEMS SARL

France
Tel.: +33 (0)1 41 33 97 97
e-mail: info@flir.fr

FLIR SYSTEMS S.R.L.

Italy
Tel.: +39 02 99 45 10 01
e-mail: info@flir.it

FLIR SYSTEMS AB

Belgium
Tel.: +32 (0)3 287 87 10
e-mail: info@flir.be

WWW.FLIR.COM



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
©Copyright 2004, FLIR Systems, Inc.
All other brand and product names are trademarks of their respective owners